



# Technische Dokumentation

Rundstrahler 2 dB

Best.Nr.: M302809699




<b>Rundstrahler 2 dB</b>		
<b>Technical Data</b>		
<b>GSM</b>	Frequency Range	900/1800 MHz
	VSWR*	< 2.0 typ.
	Peak Gain*	+2 dBi typ. (900 MHz) - 1 dBi typ. (1800 MHz)
	Power Max.	10 W
		* Measured with 0.6m cable on 30x30cm ground plane
<b>Mechanical Data</b>		
	Dimensions (ØxH)	ca. 76 mm x 21 mm
	Temperature Range	-40°C to +85°C (operating temperature)
	Connection (standard)	ca. 3m connecting cable RG174
	Connector	FME (f)
		Waterproof TÜV passed IP69K mounted
		Antenna available in black
		RoHS- and REACH-conform

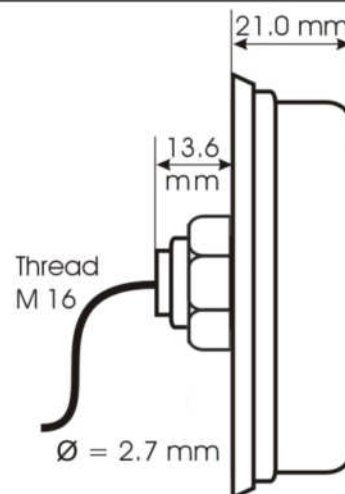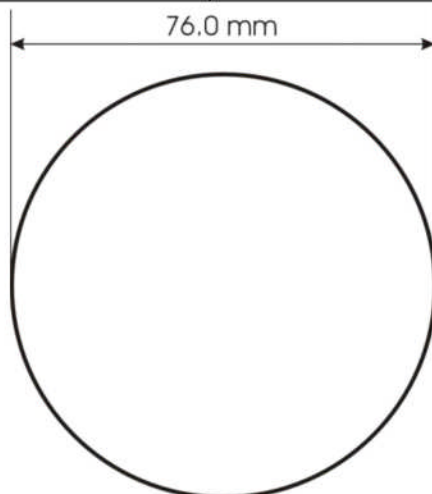




Rotation diagram (typ.)\*

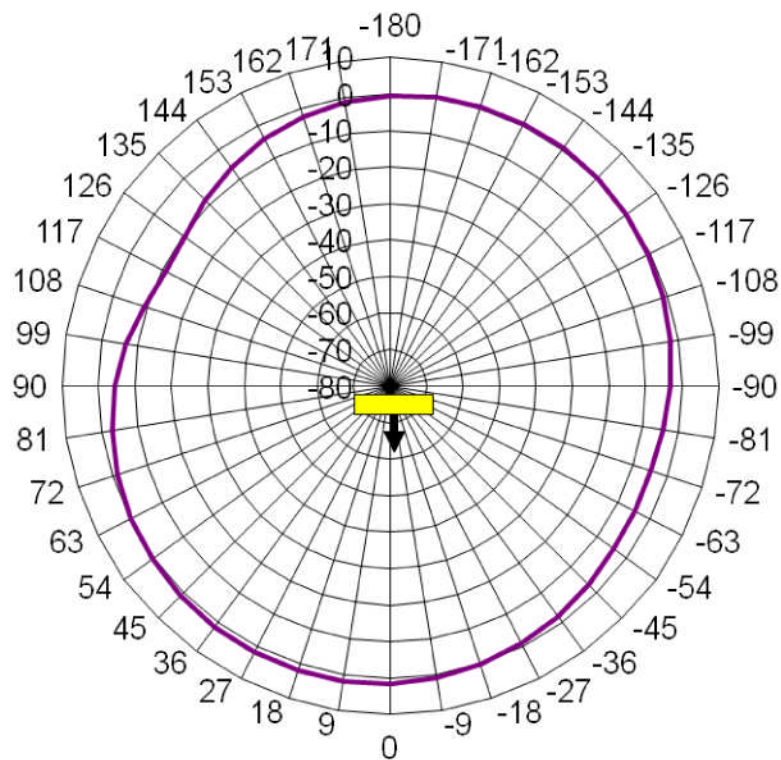

GSM 900 MHz

Peak Gain: +2dBi

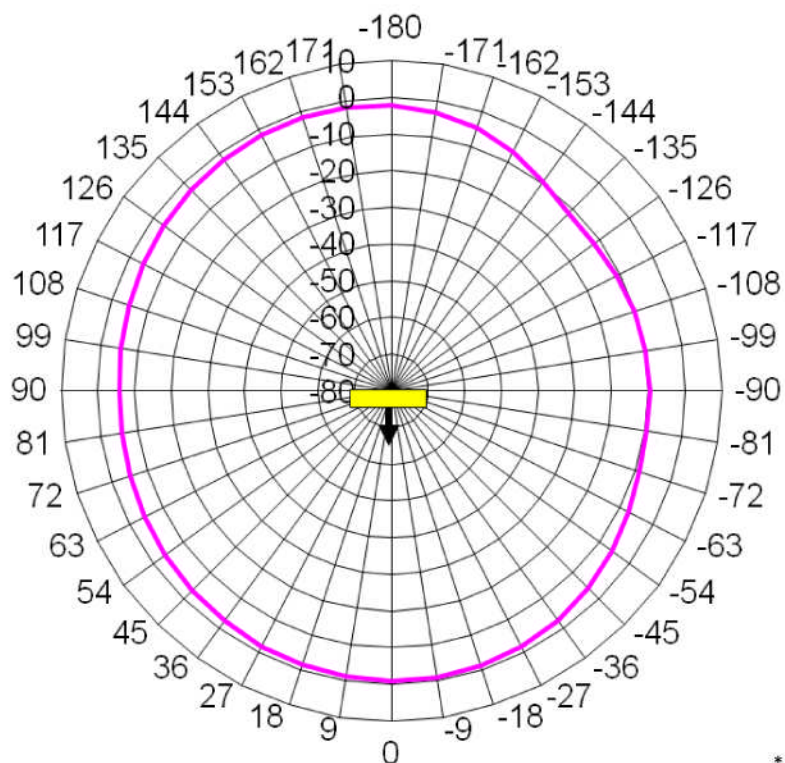

GSM 1800 MHz

Peak Gain: -1 dBi

\* Measured with 0.6m cable on 30x30cm ground plane